This style is mounted to the ceiling and is recommended where complete floor access is desired. This system requires pre-installed structural ceiling support and is not recommended for ceiling heights over 8'.

Phenolic Privacy Partition Series Features

- Includes No-Site™ design as standard eliminating gaps between doors and pilasters
- Preinstalled threaded inserts on doors and pilasters reducing installation time
- Rabbeted edge on hinge and latch side providing flush finish and full privacy
- Indicator latches are standard
- Available in 9 new colors

Construction

Solid phenolic black core is composed of compressed cellulose fibers impregnated with resins. The surface laminate is fused to the resin-impregnated core. All edges are black, machined and finished smooth with a 45-degree chamfered edge. Doors and pilasters include a built-in, No-Site feature that eliminates sight lines into the stall. Materials will not delaminate even under extreme conditions. Materials are non-absorbent, impact and graffiti resistant. Materials are impervious to steam, soaps, and detergents and will not mildew.

Panels

Panels are ½" thick, constructed from solid phenolic core.

Doors

Doors are ¾" thick, constructed from solid phenolic core with factory installed inserts for attaching the hinge.

Pilasters

Pilasters are ¾" thick, constructed from solid phenolic core. Hinged pilasters come with factory installed inserts for attaching the hinges. U-type bracket(s) shall be attached to the ceiling edge of the pilaster using Torx-head thru-bolts (provided in shoe kit). Pilasters shall be attached to the ceiling using 3/8-16 threaded rod(s), hex nuts, and washers (included or shipped in advance upon request). Structural support and drilling provided by others.

Hardware

Bradley standard hardware is constructed from cast stainless steel with a satin brushed finish or stamped stainless steel (door hinge and indicator latch). Compartments are provided with all hardware and stainless steel torx-head fasteners to complete an installation on applications with masonry block walls.

Door Hardware

Surface mounted hinges are secured to the door and pilaster using factory installed inserts and Torx-head screws. Surface-mounted indicator slide latch with emergency egress requires no twisting motion and complies with all Federal ADA guidelines. Keeper is mounted to the pilaster using stainless steel Torx-head screws. Doors 32" wide or less are provided with a combination coat hook/bumper. Doors 34", 35" and 36" wide are provided with an individual coat hook, door bumper, and door pulls. Theft-resistant fasteners are supplied with all hardware.



Series 600

Brackets

Stirrup-type, single-ear, double-ear, and U-brackets are provided.

Sleeves

Sleeves are 1-piece, 4" high, 300 Series stainless steel with #4 satin brushed finish and are secured to the face of the pilaster using Torx-head screws.

Product Compliance

Complies with

- ADA
- ICC/ANSI 117.1
- TAS

Listed by UL Environment to

- GreenGuard Gold

Serves the American Disabilities Act, ICC/ANSI 117.1, and California Title 24 and Texas Accessibility Standards guidelines, when installed according to these requirements. Consult local codes and standards.

Verify all rough-in dimensions prior to installation.


Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

This information is subject to change without notice.


© 2026 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Example of Dimensions – Top View (mm)

☑ A wide range of stall widths are available.

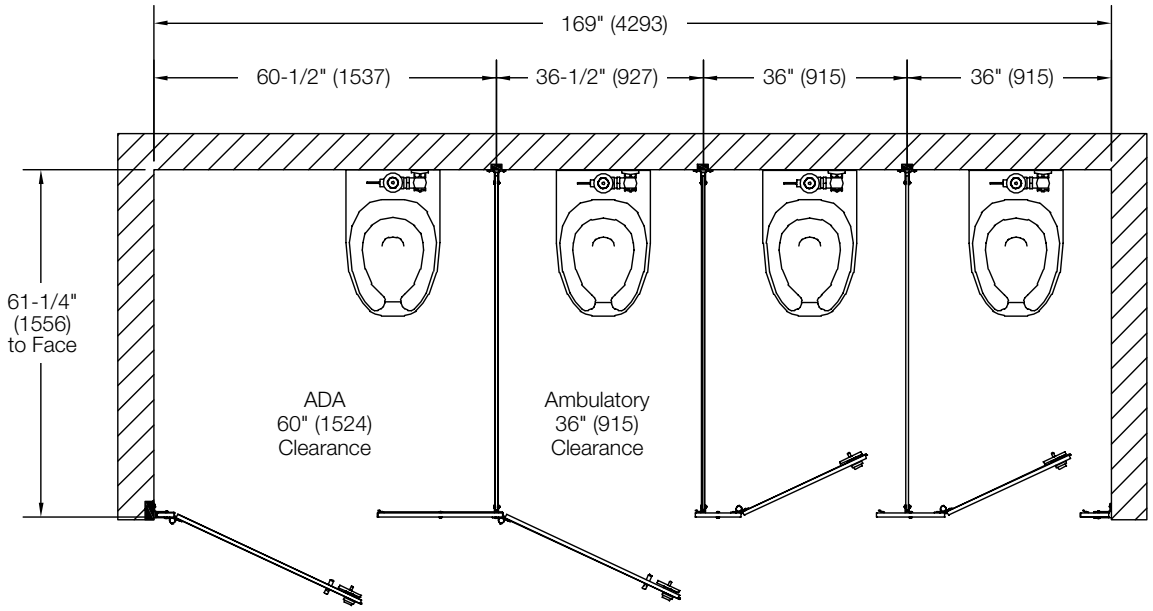

Example of Dimensions – Front View (mm)

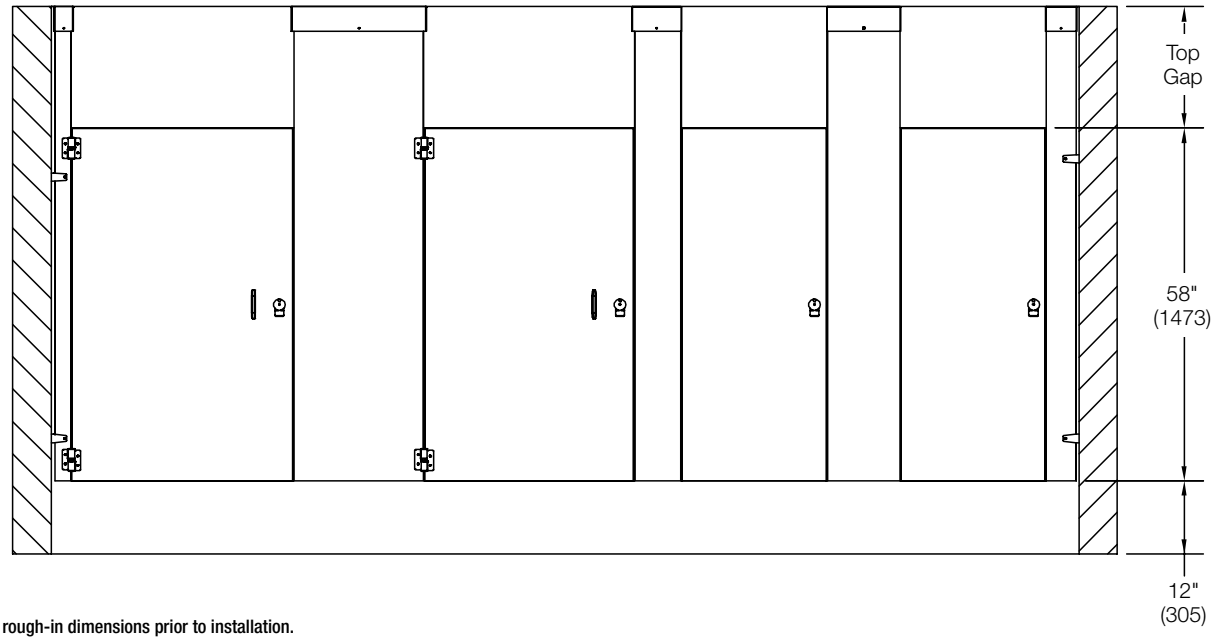

Verify all rough-in dimensions prior to installation.


Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

View Latest Version

© 2026 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Example of Dimensions – Side View (mm)

☑ A wide range of stall depths are available.

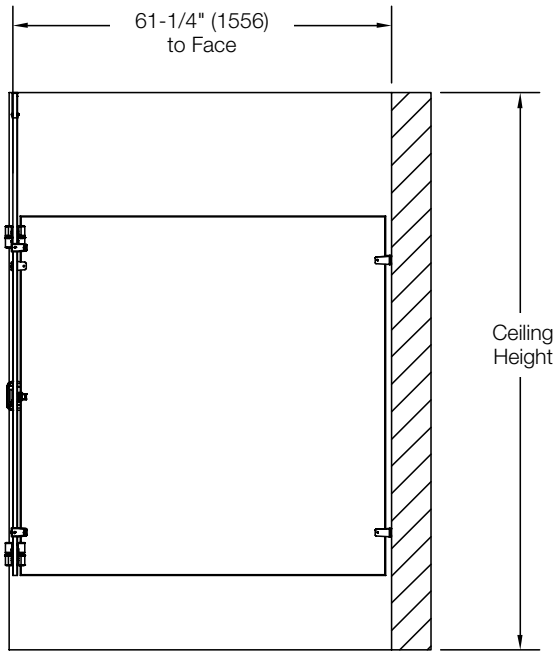

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

This information is subject to change without notice.

© 2026 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com

Models (Must select one)

Model	Description
○ PH600	Ceiling-Hung

Standard Selections (Must select one from each category)

Series	Description
○ CH	Series 600

Height: Room (Enter floor to ceiling height)

○ _____ (85"–120")

Style

○ NSI	No-Site

Color [1]

○ 7949	Asian Night	○ 7975	Raw Chestnut
○ 4820	Carbon Ev	○ D96	Shadow
○ D381	Fashion Grey	○ 4876	Sheer Mesh
○ 8229	Friston Ash	○ D91	Slate Grey
○ 4623	Graphite Nebula	○ CST	_____

Height: Door Panel

○ 58	58" H Doors and Panels (12" AFF)

Cutout: Panel

○ NONE	No Panel Cutouts
○ CST	Custom [2]

Hardware: Bracket

○ SS2	Stirrup Stainless Steel (2 per) [6]
○ SS3	Stirrup Stainless Steel (3 per)
○ CSS	Continuous Stainless Steel

Hardware: Hinge

○ SS	Surface Mount Stainless Steel

Hardware: Latch

○ SI	Indicator Stainless Steel

Optional Selections: Urinal Screens

Style

○ NONE	No Urinal Screen
○ WH	Wall Hung
○ S	Floor-Mount Overhead-Braced
○ F	Floor-Braced
○ FC	Floor-to-Ceiling (FTC: Same as Room Height)
○ AP60	Aluminum Post (60")
○ AP120	Aluminum Post (120")

Height

○ NONE [3]	None
○ 42	42" H Screen
○ 48	48" H Screen

Hardware

○ NONE [3]	None
○ SS2	Stirrup Stainless Steel (2 per) [7]
○ SS3	Stirrup Stainless Steel (3 per)
○ CSS	Continuous Stainless Steel

Optional Selections: Sight Screens

Style

○ NONE	No Site Screen
○ S	Floor-Mount Overhead-Braced
○ F	Floor-Braced
○ FC	Floor-to-Ceiling (FTC: Same as Room Height)
○ AP60	Aluminum Post (60")
○ AP120	Aluminum Post (120")

Height [4]

○ NONE [5]	None
○ 58	58" H Screen

Hardware

○ NONE [5]	None
○ SS2	Stirrup Stainless Steel (2 per) [7]
○ SS3	Stirrup Stainless Steel (3 per) [8]
○ CSS	Continuous Stainless Steel

1 Any directional wood grain panel where the "to face" dimension is greater than 62" will run perpendicular to the direction throughout the rest of the partition design. Please review for pattern conflicts

2 Cutouts are specified per panel. Max (2) cutouts per panel

3 Only available with Urinal Screen Style "NONE"

4 Sight screen height must be equal to or greater than selected door/panel height

5 Only available with Sight Screen Style "NONE"

6 Only available with Door/Panel Height "58"

7 Only available with Hardware - Bracket "SS2"

9 Only available with Hardware - Bracket "SS3"

Verify all rough-in dimensions prior to installation.

Consult local and national codes. Conformity and compliance to local and national codes is the responsibility of the installer.

This information is subject to change without notice.

© 2026 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com