



A WATTS Brand

4737

Napkin Disposal

Model 4737 — Recessed

Model 4737-10 — Semi-Recessed (recesses 2 $\frac{1}{8}$ " ; projects 2")

Model 4737-11 — Surface-Mounted (projects 4 $\frac{1}{8}$ ")

- ☒ Contemporary Series — Satin Finish
- ☒ Concealed Hinge and Lock

Product Materials

CABINET: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with burr-free edges.

DOOR: 18 gauge stainless steel. $\frac{1}{2}$ " return for maximum rigidity. Concealed full length stainless steel piano hinge and tumbler lock.

PUSH FLAP DOOR: 22 gauge stainless steel with exposed surfaces in architectural satin finish. Heavy-duty stainless steel piano hinge.

WASTE RECEPTACLE INSERT fabricated of leakproof molded plastic.

Capacity

1.5 gal (0.2 cu. ft.)

Operation

Waste container removable by unlocking cabinet door. Furnished with waxed paper liner. Box of 500 waxed paper liners are available by ordering part number P11-022.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 11 $\frac{3}{8}$ "W x 15 $\frac{3}{4}$ "H x 4"D (Semi-recessed unit only 2 $\frac{1}{8}$ " deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required.

Guide Specification

Recessed napkin disposal shall be fabricated of stainless steel with exposed surfaces in satin finish. Door with full-length concealed piano hinge and lock. Self-closing push flap door secured by piano hinge. Removable molded plastic receptacle.

Overall dimensions: 13"W x 17 $\frac{3}{8}$ "H x 4 $\frac{1}{8}$ "D.



ADA Compliant

- ☒ Consult local and national accessibility codes for proper installation guidelines.
- ☒ Conformity and compliance to local and national codes is the responsibility of the installer.




A WATTS Brand

4737

Napkin Disposal

Dimensions

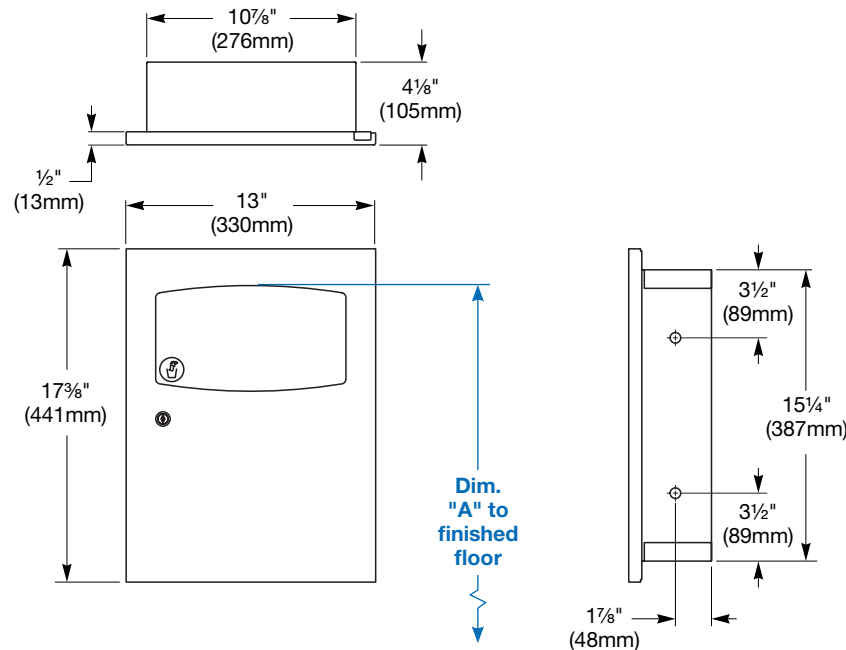

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Top of Door (5 1/2" Door Opening) to Finished Floor	48" (1219mm)	49" (1245mm)	33 1/4" (845mm)
	45" (1143mm)	46" (1168mm)	30 1/4" (768mm)
	42" (1067mm)	43" (1092mm)	27 1/4" (692mm)
	36" (914mm)	37" (940mm)	21 1/4" (540mm)
	33" (838mm)	34" (864mm)	18 1/4" (464mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	11 3/8" (289mm) Wide x 15 3/4" (400mm) High x 4" (102mm) Deep		
Semi-Recessed:	11 3/8" (289mm) Wide x 15 3/4" (400mm) High x 2" (51mm) Deep		