



A WATTS Brand

S19-120HFP

Frost-Proof Wall-Mounted Drench Shower

- Exceeds American National Standard Z358.1 Specifications
- Galvanized Steel Protected with BradTect® Safety Yellow Coating
- Universal Identification Sign and Inspection Tag Included
- Full, One-Year Warranty
- SpinTec™ showerheads are covered by one or more of the following patents: 8113446; D594,089; D669,555; Reg. Comm. Des. D001079560-0001. Other patents pending.
- Classified by Underwriters Laboratory Inc. to ANSI Z358.1

Specifications

This unit is made specifically for areas subject to freezing. Compact drench shower fits easily into any work environment. Shower valve operates quickly by a stainless steel push flag handle. Shower provides a superior washdown with a more even spray pattern.




This plumbing fixture is not intended to dispense water for human consumption through drinking or for preparation of food or beverages.


Model	Description
S19-120HFP	Frost-Proof Wall-Mounted Drench Shower
S19-2150	Navigator EFX20 - Emergency Thermostatic Mixing Valve

Tepid Water Options

[Navigator S19-2150 EFX20
Emergency Thermostatic Mixing Valve](#)




[Keltech SNA-Series
Tankless Water Heater](#)



NAVIGATOR

Satisfies ANSI/ISEA Z358.1 tepid water requirements.

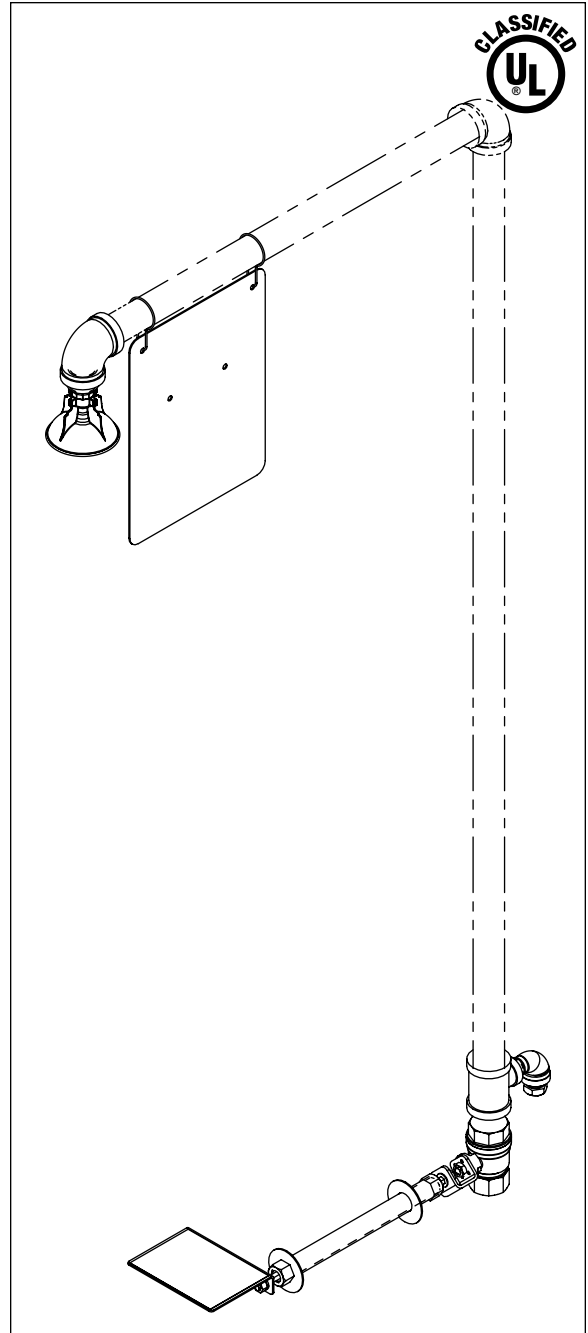



A WATTS Brand


S19-120HFP

Frost-Proof Wall-Mounted Drench Shower

Standard Equipment

SpinTec™ Showerhead

3.1" (78.7mm) diameter highly visible yellow impact-resistant plastic for high visibility in emergency situations. SpinTec drench showerhead features integral 22 GPM (83.3 L) flow control, conserving water and helping to accurately size your tepid water system.

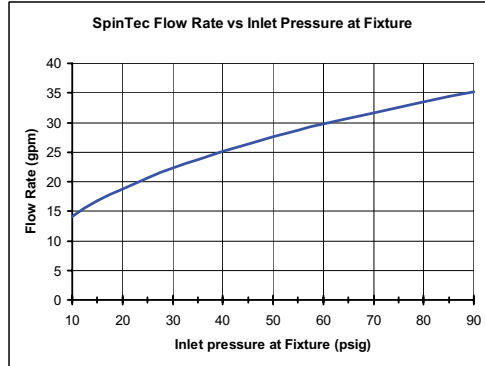

Frost-Proof Shower Valve

Chrome-plated brass 1" NPT stay-open valve. Hand operated by a stainless steel push handle. Standard depth 36" (914mm). Special order for other bury depths (18", 48", 60", 72").

Pipe and Fittings

1" galvanized steel with BradTect® safety yellow coating. Standard wall thickness is 8"-12". Special order for other wall thicknesses. (0"-8" or 12"-18").

Water Supply

1" NPT.

